


## Turbo 2 ultrafast high voltage rectifier

Datasheet - production data

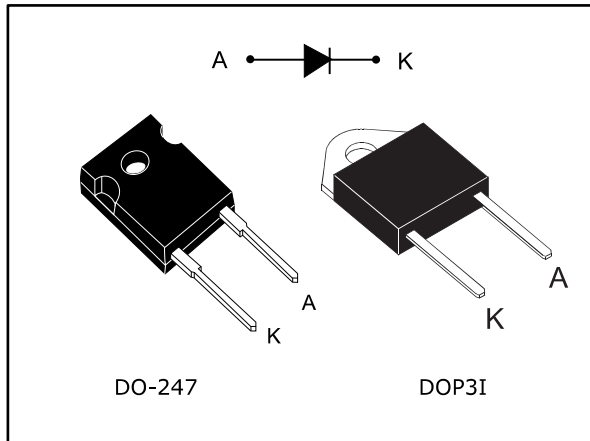

### Description

The device is developed using ST's Turbo 2 600 V technology. It is well-suited as a boost diode, especially for use in continuous mode power factor corrections and hard switching conditions.

This device is also intended for use as a free wheeling diode in power supplies and other power switching applications.

**Table 1: Device summary**

| Symbol         | Value  |
|----------------|--------|
| $I_{F(AV)}$    | 30 A   |
| $V_{RRM}$      | 600 V  |
| $V_F$ (typ.)   | 1.10 V |
| $T_j$          | 175 °C |
| $t_{rr}$ (max) | 50 ns  |

### Features

- Ultrafast switching
- Low reverse current
- Low thermal resistance
- Reduces switching and conduction losses
- Insulated package: DOP3I
  - Insulating voltage = 2500  $V_{RMS}$  sine

# 1 Characteristics

**Table 2: Absolute ratings (limiting values at 25 °C, unless otherwise specified)**

| Symbol              | Parameter                                       |                                   | Value                   | Unit |   |
|---------------------|---|-----------------------------------|-------------------------|------|---|
| V <sub>RRM</sub>    | Repetitive peak reverse voltage                 |                                   | 600                     | V    |   |
| I <sub>F(RMS)</sub> | Forward rms current                             |                                   | 50                      | A    |   |
| I <sub>F(AV)</sub>  | Average forward current,<br>δ = 0.5 square wave | DO-247                            | T <sub>C</sub> = 115 °C | 30   | A |
|                     |   | DOP3I                             | T <sub>C</sub> = 85 °C  |      |   |
| I <sub>FSM</sub>    | Surge non repetitive forward current            | t <sub>p</sub> = 10 ms sinusoidal |                         | 300  | A |
| T <sub>stg</sub>    | Storage temperature range                       |                                   | -65 to +175             | °C   |   |
| T <sub>j</sub>      | Maximum operating junction temperature          |                                   | 175                     | °C   |   |

**Table 3: Thermal parameters**

| Symbol               | Parameter        |        | Max. value | Unit |
|----------------------|------------------|--------|------------|------|
| R <sub>th(j-c)</sub> | Junction to case | DO-247 | 1.1        | °C/W |
|                      |                  | DOP3I  | 1.7        |      |

**Table 4: Static electrical characteristics**

| Symbol                        | Parameter               | Test conditions         |                                   | Min. | Typ. | Max. | Unit |
|-------------------------------|-------------------------|-------------------------|-----------------------------------|------|------|------|------|
| I <sub>R</sub> <sup>(1)</sup> | Reverse leakage current | T <sub>j</sub> = 25 °C  | V <sub>R</sub> = V <sub>RRM</sub> | -    |      | 25   | μA   |
|                               |                         | T <sub>j</sub> = 150 °C |                                   | -    | 80   | 800  |      |
| V <sub>F</sub> <sup>(2)</sup> | Forward voltage drop    | T <sub>j</sub> = 25 °C  | I <sub>F</sub> = 30 A             | -    |      | 1.85 | V    |
|                               |                         | T <sub>j</sub> = 150 °C |                                   | -    | 1.10 | 1.40 |      |

**Notes:**

(1)Pulse test: t<sub>p</sub> = 5 ms, δ < 2%

(2)Pulse test: t<sub>p</sub> = 380 μs, δ < 2%







To evaluate the conduction losses, use the following equation:

$$P = 1.07 \times I_{F(AV)} + 0.011 \times I_{F(RMS)}^2$$


Table 5: Dynamic electrical characteristics

| Symbol   | Parameter                | Test conditions       |  | Min. | Typ. | Max. | Unit |
|----------|--------------------------|-----------------------|--|------|------|------|------|
| $t_{rr}$ | Reverse recovery time    | $T_j = 25\text{ °C}$  | $I_F = 0.5\text{ A}$<br>$I_{rr} = 0.25\text{ A}$<br>$I_R = 1\text{ A}$                               | -    |      | 50   | ns   |
|          |                          |                       | $I_F = 1\text{ A}$<br>$V_R = 30\text{ V}$<br>$di_F/dt = -50\text{ A}/\mu\text{s}$                    | -    | 50   | 70   |      |
| $I_{RM}$ | Reverse recovery current | $T_j = 125\text{ °C}$ | $I_F = 30\text{ A}$<br>$V_R = 400\text{ V}$<br>$di_F/dt = -100\text{ A}/\mu\text{s}$                 | -    | 8    | 11   | A    |
| $t_{fr}$ | Forward recovery time    | $T_j = 25\text{ °C}$  | $I_F = 30\text{ A}$<br>$V_{FR} = 1.1 \times V_F \text{ max}$<br>$di_F/dt = 100\text{ A}/\mu\text{s}$ | -    |      | 500  | ns   |
| $V_{FP}$ | Forward recovery voltage |                       |  | -    | 2.5  |      | V    |


### 1.1 Characteristics (curves)

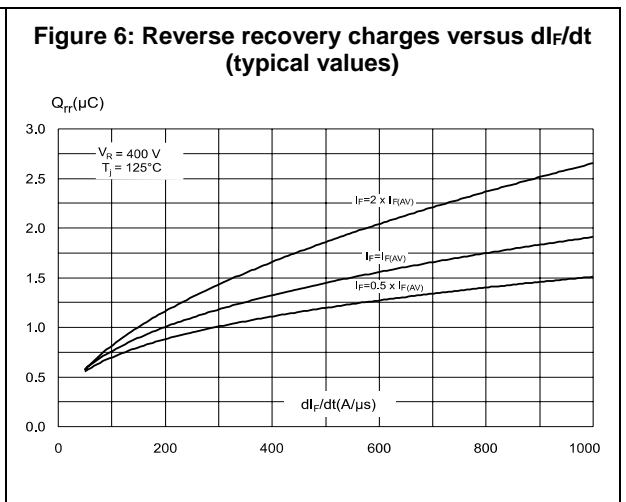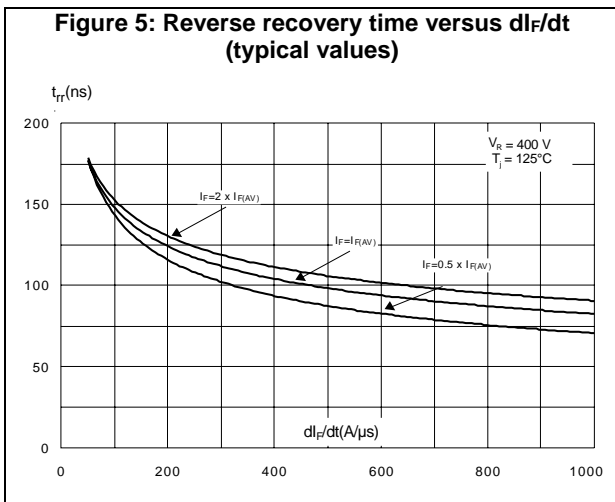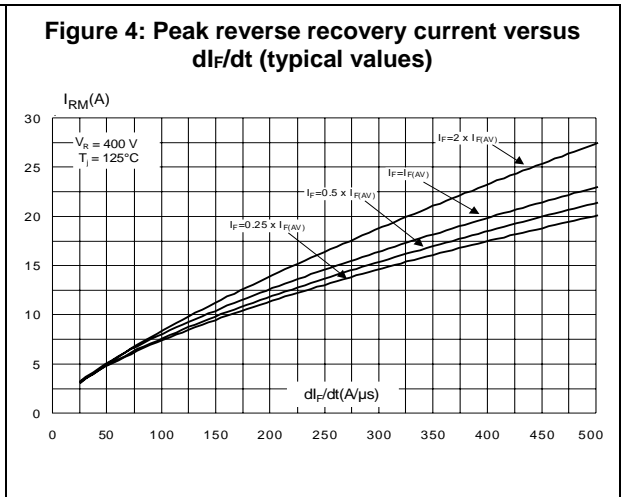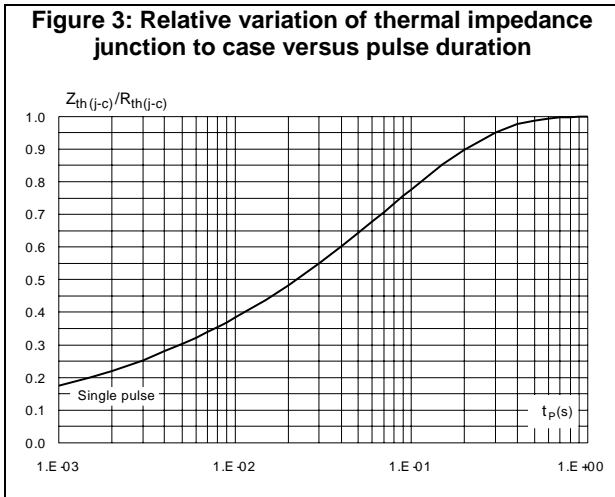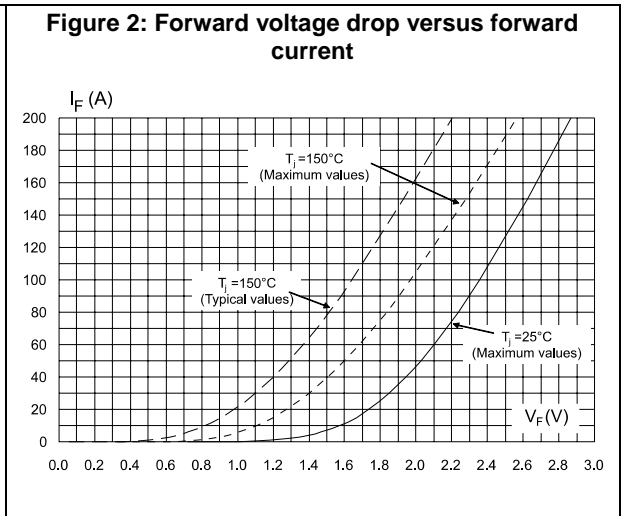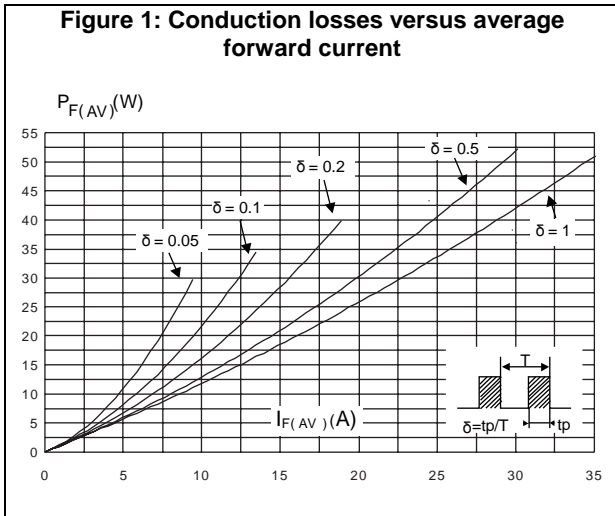


**Figure 7: Softness factor versus  $di_F/dt$  (typical values)**

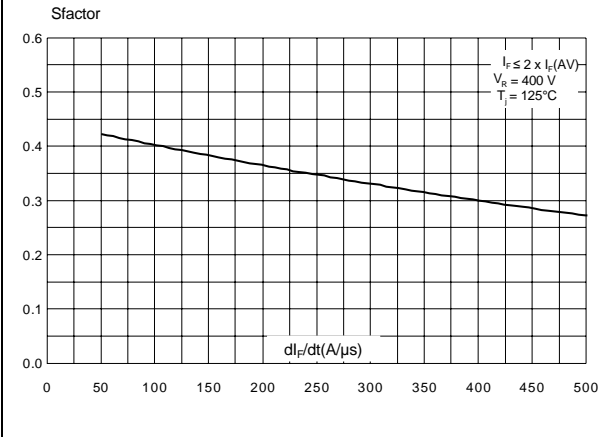

**Figure 8: Relative variations of dynamic parameters versus junction temperature**

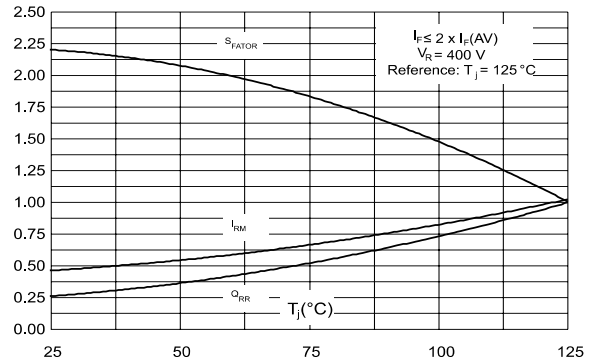

**Figure 9: Transient peak forward voltage versus  $di_F/dt$  (typical values)**

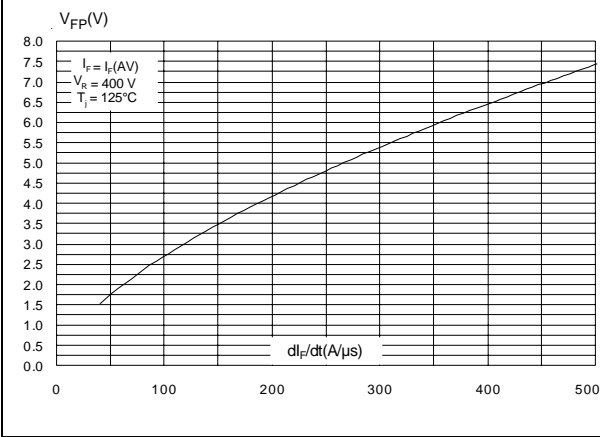

**Figure 10: Forward recovery time versus  $di_F/dt$  (typical values)**


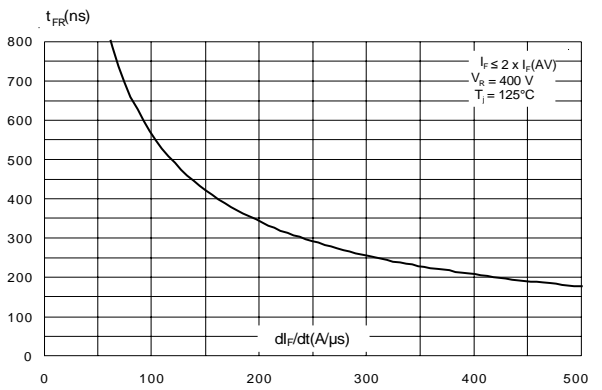


Figure 11: Junction capacitance versus reverse voltage applied (typical values)

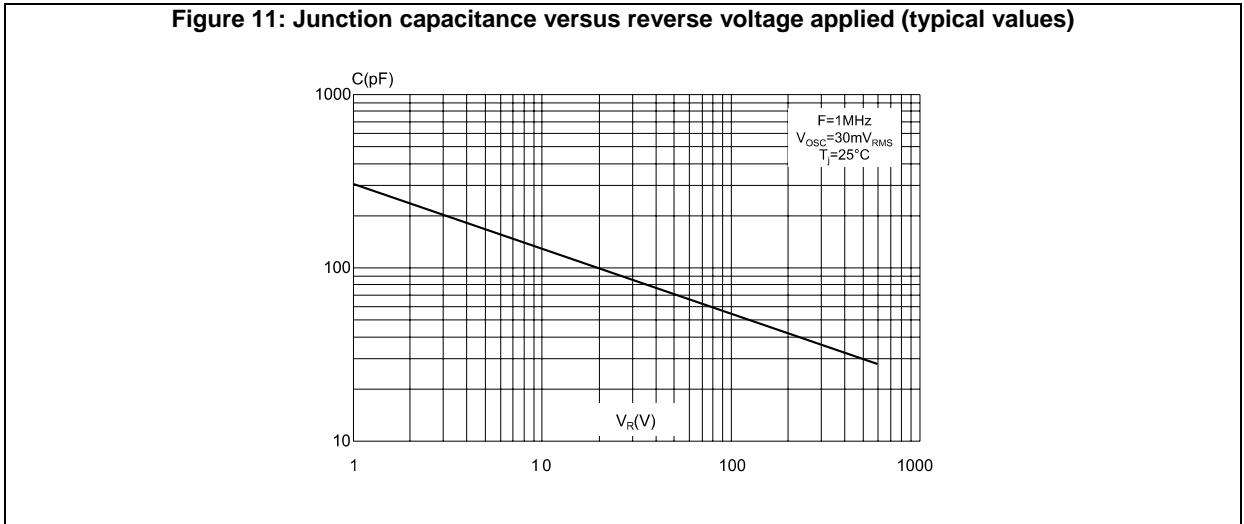

## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

- Epoxy meets UL94, V0
- Cooling method: by conduction (C)
- Recommended torque value: 0.55 N·m (DO-247)
- Recommended torque value: 0.9 to 1.2 N·m (DOP3I)
- Maximum torque value: 1.0 N·m (DO-247)

## 2.1 DO247 package information

Figure 12: DO-247 package outline

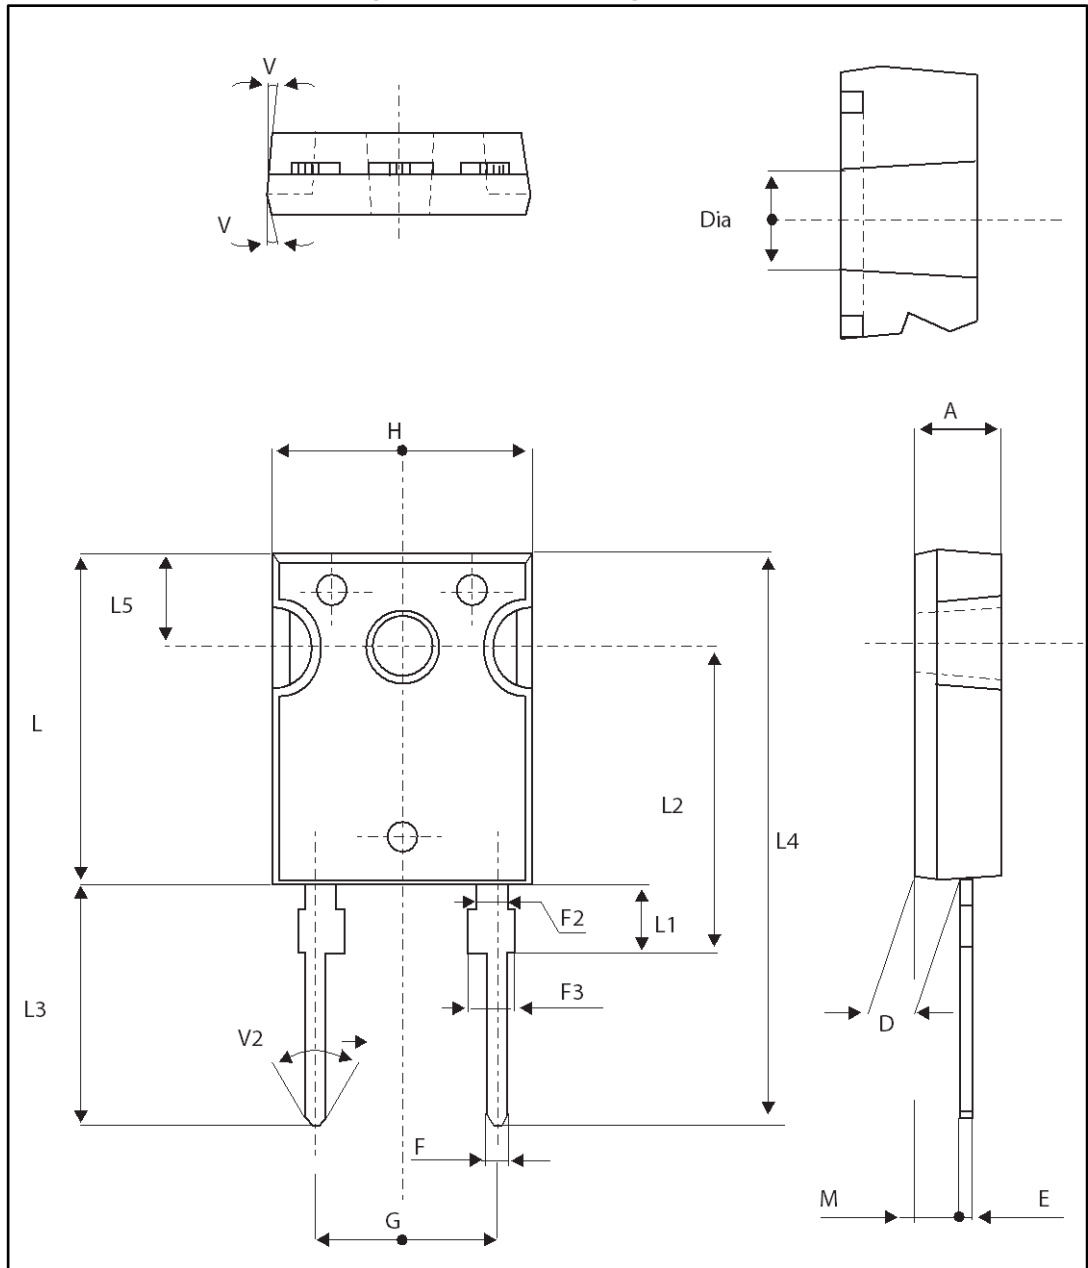




Table 6: DO-247 package mechanical data

| Ref. | Dimensions  |       |            |       |
|------|-------------|-------|------------|-------|
|      | Millimeters |       | Inches     |       |
|      | Min.        | Max.  | Min.       | Max.  |
| A    | 4.85        | 5.15  | 0.191      | 0.203 |
| D    | 2.20        | 2.60  | 0.086      | 0.102 |
| E    | 0.40        | 0.80  | 0.015      | 0.031 |
| F    | 1.00        | 1.40  | 0.039      | 0.055 |
| F2   | 2.00 typ.   |       | 0.078 typ. |       |
| F3   | 2.00        | 2.40  | 0.078      | 0.094 |
| G    | 10.90 typ.  |       | 0.429 typ. |       |
| H    | 15.45       | 15.75 | 0.608      | 0.620 |
| L    | 19.85       | 20.15 | 0.781      | 0.793 |
| L1   | 3.70        | 4.30  | 0.145      | 0.169 |
| L2   | 18.50 typ.  |       | 0.728 typ. |       |
| L3   | 14.20       | 14.80 | 0.559      | 0.582 |
| L4   | 34.60 typ.  |       | 1.362 typ. |       |
| L5   | 5.50 typ.   |       | 0.216 typ. |       |
| M    | 2.00        | 3.00  | 0.078      | 0.118 |
| V    | 5°          |       | 5°         |       |
| V2   | 60°         |       | 60°        |       |
| Dia. | 3.55        | 3.65  | 0.139      | 0.143 |

## 2.2 DOP3I package information

Figure 13: DOP3I package outline

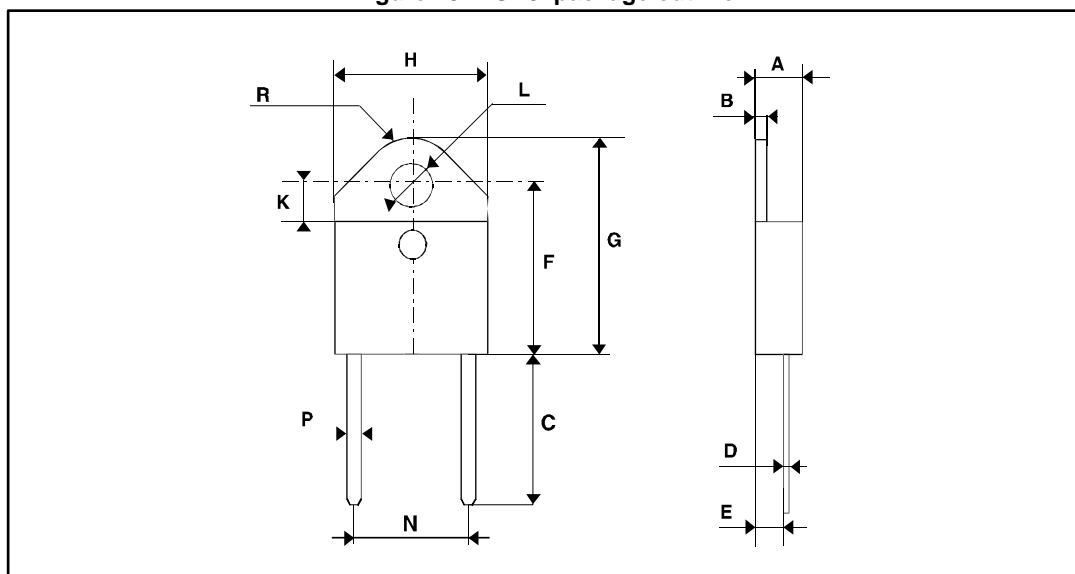


Table 7: DOP3I package mechanical data

| Ref. | Dimensions  |       |        |       |
|------|-------------|-------|--------|-------|
|      | Millimeters |       | Inches |       |
|      | Min.        | Max.  | Min.   | Max.  |
| A    | 4.40        | 4.60  | 0.173  | 0.181 |
| b    | 1.20        | 1.40  | 0.047  | 0.055 |
| c    | 1.45        | 1.55  | 0.057  | 0.061 |
| c1   | 0.50        | 0.70  | 0.020  | 0.028 |
| D    | 12.15       | 13.10 | 0.474  | 0.516 |
| E    | 15.10       | 15.50 | 0.594  | 0.610 |
| E1   | 7.55        | 7.75  | 0.297  | 0.305 |
| e    | 10.80       | 11.30 | 0.425  | 0.445 |
| G    | 20.4        | 21.10 | 0.815  | 0.831 |
| L    | 14.35       | 15.60 | 0.565  | 0.614 |
| P    | 4.08        | 4.17  | 0.161  | 0.164 |
| Q    | 2.70        | 2.90  | 0.106  | 0.114 |
| R    | 4.60        |       | 0.181  |       |
| Y    | 15.80       | 16.50 | 0.622  | 0.650 |

### 3 Ordering information

Table 8: Ordering information

| Order code | Marking   | Package | Weight | Base qty. | Delivery mode |
|------------|-----------|---------|--------|-----------|---------------|
| STTH3006W  | STTH3006W | DO-247  | 4.40 g | 30        | Tube          |
| STTH3006PI | STTH3006P | DOP3I   | 4.46 g | 30        | Tube          |

### 4 Revision history

Table 9: Document revision history

| Date        | Revision | Changes      |
|-------------|----------|--------------|
| 17-May-2017 | 1        | First issue. |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[STTH3006D](#) [STTH3006W](#) [STTH3006PI](#)