


Reed Switch

P/N: KLS7-8381



Dimensions

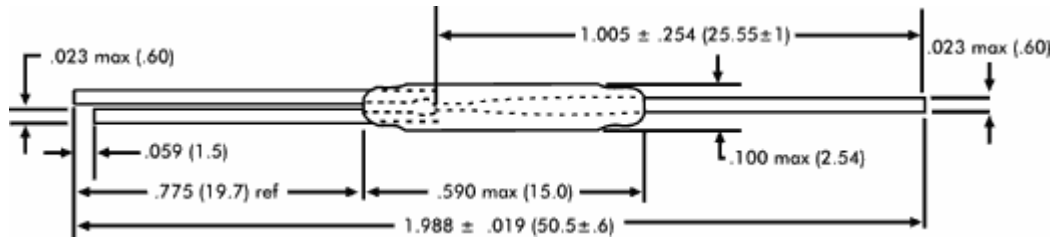

ROHS

Unit:mm

Contact Form	1C SPST-NC	
Contact Material	Ru	
Max. Contact Rating	5W	
Max. Switching Voltage	DC175V/AC125V	
Max. Switching Current	DC400mA/AC280mA	
Max. Initial Contact Resistance	120mΩ	
Pull In Value(At)	10-30	
Drop out Value(At)	Min5	
Min. Breakdown Voltage	200V	
Max. Contact Capacitance	0.8pF	
Min. Insulation Resistance	10 ⁹ Ω	
Typ. Resonant Frequency	TBD	
Operation Temperature	-55°C ~ +120°C	
Electrical Life (at Resistive Load)	>1 × 10 ⁸ (20 VDC,500mA,125HZ) Contact Resistance>2Ω	>1 × 10 ⁶ (50VDC,100mA,50HZ) Contact Resistance>1Ω

KLS ELECTRONIC CO., LTD.

NO. 8-1, RONGXIA RD. XIAPU SHANQIAN INDUSTRIAL ZONE BEILUN NINGBO ZHEJIANG 315807

TEL:86-574-86828566 FAX:86-574-86824882

HTTP:WWW.KLSELE.COM