

# TERMINAL BLOCK Connector



## Fuse Series

### KLS2-510EW Series

#### Electrical :



Rated voltage: 250V  
Rated current: 10A  
Contact resistance: 20mΩ  
Insulation resistance: 5000MΩ/1000V  
Withstanding Voltage: AC2500V/1Min  
Wire range: 18-12AWG 2.5mm<sup>2</sup>

#### Material

Screws: M3 steel Zinc plated  
Contact: Brass  
Pin header: Brass, Ni plated  
Housing: PA66, UL94V-0

#### Mechanical

Temp. Range: -40°C~+105°C  
MAX Soldering: +250°C for 5 Sec.  
Torque: 0.5Nm (4.5lb.in)  
Strip length: 7-8mm

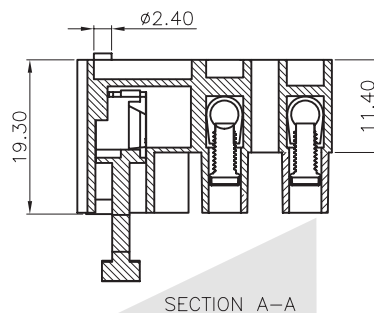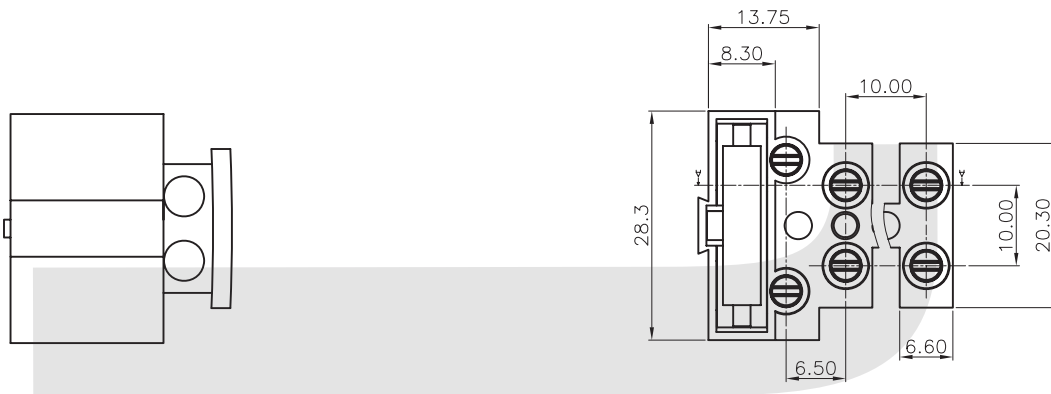

## ORDER INFORMATION

Product NO.: KLS2-510 E W-3P

Pos. NO. \_\_\_\_\_ 3P= Pins or 1P 2P 3P 4P 5P  
Series No. \_\_\_\_\_  
E=With earth screw hole \_\_\_\_\_ W=With wire protection