

■ SMT SOLDER AREA
 ▨ NO WIRING AREA
RECOMMENDED PCB LAYOUT
 GENERAL TOLERANCE ± 0.05

Material:

Housing:LCP,UL 94 V-0,Black.

Terminal:Copper Alloy.

Shell:Stainless Steel.

Electrical:

Current Rating:1A Max.

Voltage Rating:30V DC max.

Contact Resistance:30m Ω Max.




Insulation Resistance:1000M Ω Min.

Dielectric Voltage:500V r.m.s/min.


Operation Temp:-40oC ~ +85oC

Humidity:0% ~ 95%

Durability:5000 Cycles.

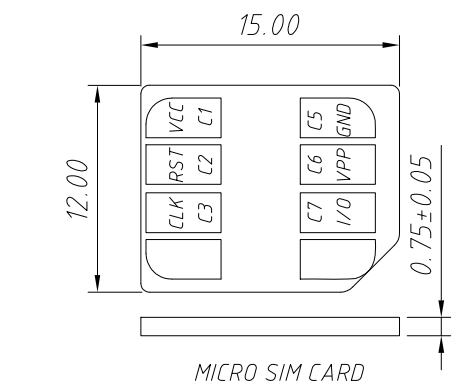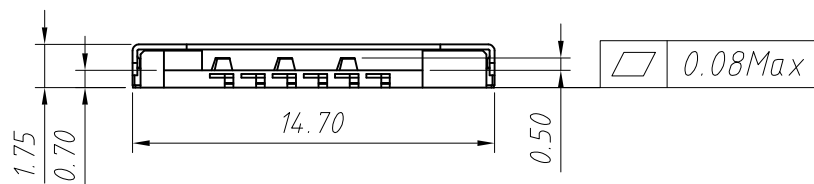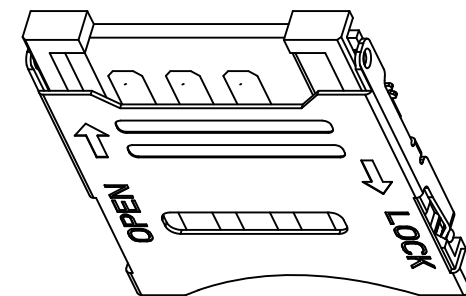

SIM Pin Assignment	
Pin #	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
X	± 0.15	X	$\pm 5^\circ$	UNITS	mm	Micro SIM CONN;HINGED TYPE;6Pin H1.8mm	
.X	± 0.03	.X	$\pm 3^\circ$	SHEET SIZE	A4		
.XX	± 0.05	.XX	$\pm 2^\circ$	KLS P/N:			
L-CLS1-SIM-072-6P-H1.8-R							
Draw by:	Jenny	Date:	2018-03-10	 NingBo KLS ELECTRONIC CO.,L TD.			
Check by:		Date:	2018-03-10				
SCALE		SHEET	1	OF	1		