


FUSE AND FUSE HOLDER



Φ 4*15 Ceramic Tube Fuse Series

KLS5-1000 Φ 4*15mm, Ceramic Tube Fuse, Quick-acting, Without Lead

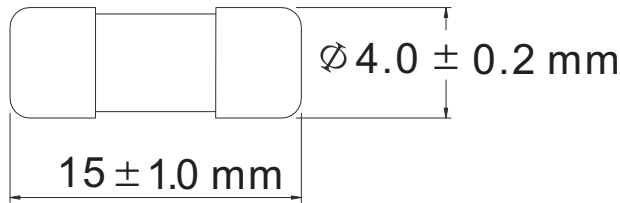


ELECTRICAL CHARACTERISTICS

| Rated current | | 2.1 In | 2.75 In | |
|---------------|-------------------------------|---------|---------|---------|
| | | Maximum | Maximum | Minimum |
| Fusing time | $\geq 32\text{-}100\text{mA}$ | 30 min | 10 ms | 500 ms |
| | $>100\text{-}6.3\text{A}$ | 30 min | 50 ms | 2 s |

| Part No. | Rated Current | Rated Voltage |
|------------|---------------|---------------|
| 1000-0100 | 100mA | 125V/250V |
| 1000-0125 | 125mA | 125V/250V |
| 1000-0150 | 150mA | 125V/250V |
| 1000-0160 | 160mA | 125V/250V |
| 1000-0200 | 200mA | 125V/250V |
| 1000-0250 | 250mA | 125V/250V |
| 1000-0300 | 300mA | 125V/250V |
| 1000-0315 | 315mA | 125V/250V |
| 1000-0350 | 350mA | 125V/250V |
| 1000-0400 | 400mA | 125V/250V |
| 1000-0500 | 500mA | 125V/25 |
| 1000-0600 | 600mA | 125V/250V |
| 1000-0700 | 700mA | 12 |
| 1000-0750 | 750mA | 125V/2 |
| 1000-0800 | 800mA | 125V/250V |
| 1000-1000 | 1A | 125V/250V |
| 1000-1200 | 1.2A | 125V/250V |
| 1000-1250 | 1.25A | 125V/250V |
| 1000-1500 | 1.5A | 125V/250V |
| 1000-1600 | 1.6A | 125V/250V |
| 1000-1800 | 1.8A | 125V/250V |
| 1000-2000 | 2A | 125V/250V |
| 1000-2500 | 2.5A | 125V/250V |
| 1000-3000 | 3A | 125V/250V |
| 1000-3150 | 3.15A | 125V/250V |
| 1000-3500 | 3.5A | 125V/250V |
| 1000-4000 | 4A | 125V/250V |
| 1000-5000 | 5A | 125V/250V |
| 1000-6000 | 6A | 125V/250V |
| 1000-6300 | 6.3A | 125V/250V |
| 1000-7000 | 7A | 125V/250V |
| 1000-8000 | 8A | 125V/250V |
| 1000-10000 | 10A | 125V/250V |
| 1000-12000 | 12A | 125V/250V |
| 1000-15000 | 15A | 125V/250V |
| 1000-20000 | 20A | 125V/250V |
| 1000-25000 | 25A | 125V/250V |
| 1000-30000 | 30A | 125V/250V |

I-T CHARACTERISTICS CURVE
电流-时间曲线图

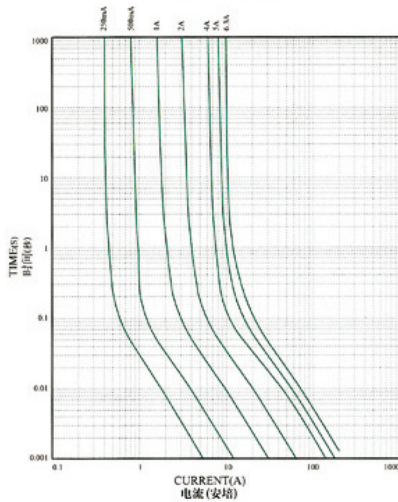

ORDER INFORMATION

Product NO.: KLS5-1000-XXXX

