DWG NO.	SH	CUSTOMER	CUSTOMER P/N	CUST. REV
315-0011	1			


DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO EMERSON CONNECTIVITY SOLUTIONS AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION


REVISIONS


REV	DESCRIPTIONS	DATE	APPROVED
AD	ECO 52460	6/18/10	CSM

TABLE I

DASH NO	CABLES ACCOMMODATED	A DIM	B DIM	C FLATS	D FLATS	E DIA	CABLE ENTRY DIA	ASSEMBLE PER	CABLE TYPE
-7	TRC-50-2 TRC-75-2	1.165	.096	.438	.438	.500	.274	TA1-189	TRIAX
-8	8227, BELDEN	1.740	.130	.625	.688	.750	.345	TA1-103	TWINAX
-9	TWC-78-2 TWC-124-2	1.165	.096	.438	.438	.500	.285	TA1-102	TWINAX
-A9 △3	BL782, TIMES BL982, TIMES BL1242, TIMES	1.165	△3	△3	.438	.500	.285	TA1-102	TWINAX
-10	RG-22 754E, AT&T	1.740	.130	.625	.688	.750	.455	TA1-103	TWINAX
-11	760A, AT&T	1.740	.130	.625	.688	.750	.347	TA1-103	TWINAX
-12	16PEVL, AT&T VI-AL, GENERAL	1.740	.130	.625	.688	.750	.485	TA1-128	TWINAX
-13	TRF-59, TIMES	1.740	.130	.625	.688	.750	.362	TA1-129	TRIAX
-13A	8232, BELDEN	1.740	.130	.625	.688	.750	.352	TA1-165	TRIAX
-14	8233, BELDEN	1.740	.130	.625	.688	.750	.490	TA1-129	TRIAX
-23	250-3884, MICRODOT	1.165	.096	.438	.438	.500	.183	TA1-189	TRIAX
-24	202-3934, MICRODOT	1.165	.096	.438	.438	.500	.191	TA1-102	TWINAX
-24A	9530A5117, RAYCHEM	1.165	.096	.438	.438	.500	.200	TA1-189	TRIAX
-25	T-43M, GENERAL	1.165	.096	.438	.438	.500	.285	TA1-102	TWINAX
-25A	5021H5331, RAYCHEM	1.165	.096	.438	.438	.500	.285	TA1-189	TRIAX
-26	7028A5518, RAYCHEM	1.165	.096	.438	.438	.500	.191	TA1-189	TRIAX
-27	T19TPSJ2619EN, WOVEN 202-3927, MICRODOT 202-3942, MICRODOT	1.165	.096	.438	.438	.500	.145	TA1-102	TWINAX
-29	TWC-78-1/TWC-124-1A	1.165	.096	.438	.438	.500	.191	TA1-102	TWINAX
-30	761A, AT&T 8441, BELDEN	1.165	.096	.438	.438	.500	.235	TA1-102	TWINAX
-32	TRC-50-1	1.165	.096	.438	.438	.500	.191	TA1-189	TRIAX
-33	TRC-75-1	1.165	.096	.438	.438	.500	.217	TA1-189	TRIAX
-42	21-204, ESSEX 4463, CONSOLIDATED	1.165	.096	.438	.438	.500	.300	TA1-189	TRIAX
-43	250-4044/250-4045 293-3930, MICRODOT	1.165	.096	.438	.438	.500	.200	TA1-189	TRIAX
-45	M27500-22TE2T14 1100-66F, STANDARD	1.165	.096	.438	.438	.500	.183	TA1-102	TWINAX
-46	9860, BELDEN	1.740	.130	.625	.688	.750	.475	TA1-103	TWINAX
-47	M17/176-00002	1.165	.096	.438	.438	.500	.164	TA1-102	TWINAX
-49	TWAC-78-1F2	1.165	.096	.438	.438	.500	.132	TA1-102	TWINAX
-54	89207, BELDEN	1.740	.130	.625	.688	.750	.323	TA1-103	TWINAX
-55	89272, BELDEN	1.165	.096	.438	.438	.500	.250	TA1-102	TWINAX
-56	GC875GC1, GRUMMAN	1.165	.096	.438	.438	.500	.191	TA1-189	TRIAX
-57	GC875GB1, GRUMMAN	1.165	.096	.438	.438	.500	.191	TA1-189	TRIAX
-58	GC875TM24H, GRUMMAN	1.165	.096	.438	.438	.500	.198	TA1-102	QUADRAX
-59	GC875LN1, GRUMMAN	1.165	.096	.438	.438	.500	.198	TA1-102	QUADRAX
-60	M17/177, THERMATICS 380-10045, BOEING	1.165	.096	.438	.438	.500	.217	TA1-189	TRIAX
-64	7528A5314, RAYCHEM	1.165	.096	.438	.438	.500	.183	TA1-189	TRIAX



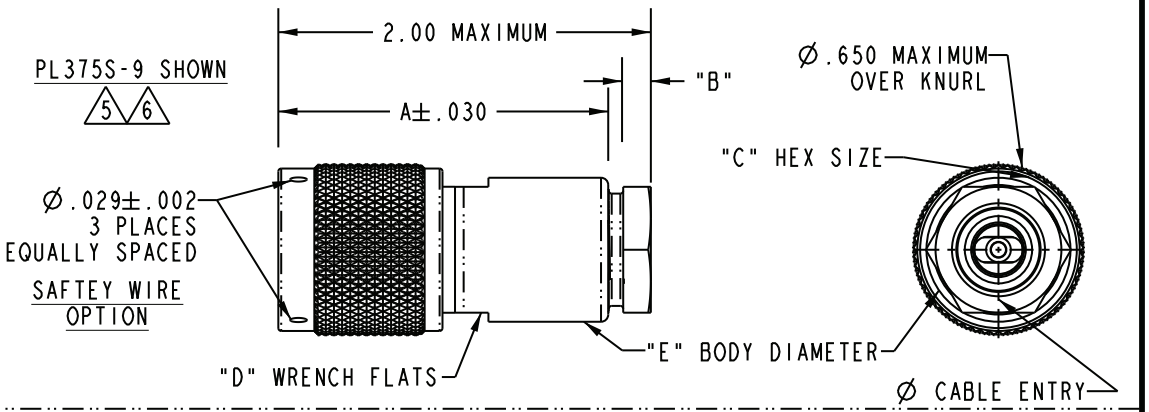

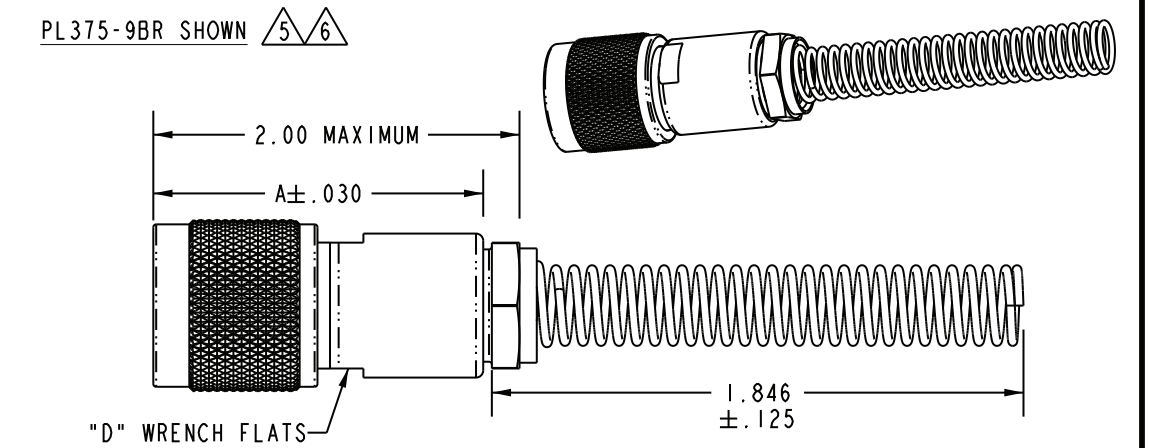

△6 IF SAFETY WIRE TYPE & BEND RELIEF SPRING REQD ADD SUFFIX "SBR" TO MODEL NO (NOT AVAILABLE WITH CABLE GROUPS -8, -10, -11, -12, -13, -13A, -14, -46, & -54)

△5 IF BEND RELIEF SPRING REQD (SEE FIG 2) ADD SUFFIX "BR" TO MODEL NO (NOT AVAILABLE WITH CABLE GROUPS -8, -10, -11, -12, -13, -13A, -14, -46, & -54)

4. IF SAFETY WIRE TYPE REQD ADD SUFFIX "S" TO MODEL NO (PL375S)

△3 CLAMP NUT OMITTED

2. CONCENTRIC TWINAX/TRIAX TRT CABLE PLUG

△1 FINISH: TFS-1A (NICKEL)

NOTES: UNLESS OTHERWISE SPECIFIED.

7. EXAMPLE OF COMPLETE MODEL NO:

PL375 S -7 BR

- PL375 — BASIC MODEL NO
- S — SAFETY WIRE TYPE (OMIT IF NOT REQD)
- -7 — DASH NO (CABLE GROUP, TABLE I)
- BR — BEND RELIEF (OMIT IF NOT REQD)

N/A	
BLANK LENGTH (REF. ONLY)	
N/A	
SURFACE AREA	

INTERPRET DRAWING PER MIL-STD-100. DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED.

TOL: UNLESS SPECIFIED.
.XX ± .02
.XXX ± .010
.XXXX ± .0010
ANGLE ± 1° 00'
CRITICAL

DRN	BPK 7/29/11
CHK	CSM 8/1/11
QUALITY	
MANUF	
APPROVED	
PRO/E FILE NO.	315-0011

MATERIAL:

FINISH: △1

DO NOT SCALE DWG

Cinch Connectivity Solutions
299 Johnson Ave. Ste. 100
Waseca, MN 56093
1-800-247-8256

TITLE:
PL375 / PL375S
PL375BR / PL375SBR

SIZE	CAGE CODE	DRAWING NO.	REV.
A	14949	315-0011	AD

SCALE	DATE	SHEET
1/1	5/23/73	1 OF 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cinch Connectivity Solutions:

PL375-7