


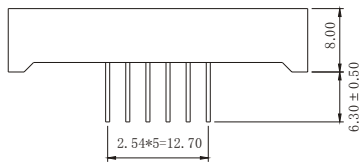


## GNT-5632Ax-Bx (TRIPLE DIGIT LED DISPLAY)


### GNT-5632 Series

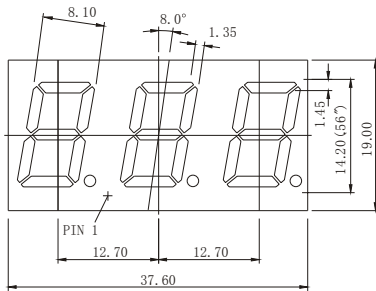

### GNT-5632Ax

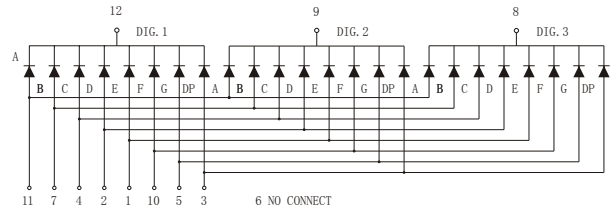

### GNT-5632Bx

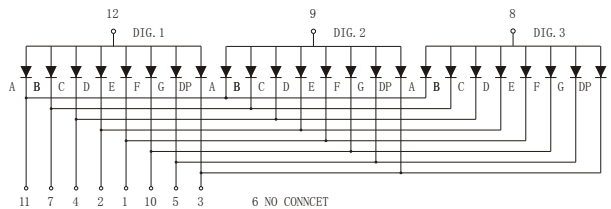

Tolerance 0.25mm unless stated

### Features:

\*0.56 INCH HIGH CHARACTER.

\*EXCELLENT CHARACTER APPEARANCE.

\*COMMON CATHODE OR COMMON ANODE.

\*I.C. COMPATIBLE.

\*LOW POWER CONSUMPTION.

Part Number	EMITTED COLOR		Common Cathode or Common Anode	Peak Wavelength (nm)	Vf (v) Typ	If (mA)	Intensity Per Segment (mcd)	
							Min.	Typ.
GNT-5632AE	GaAsP/GaP	Hi.effi Red	Common Cathode	635	2.1	20	8	12
GNT-5632AG	GaP	Green		565	2.2	20	7	11
GNT-5632AY	GaAsP/GaP	Yellow		585	2.1	20	4	7
GNT-5632AS	GaAlAs	Super Red		660	1.8	20	8	12
GNT-5632AD	GaAlAs	Ultra Red		660	1.8	20	22	28
GNT-5632BE	GaAsP/GaP	Hi.effi Red	Common Anode	635	2.1	20	8	12
GNT-5632BG	GaP	Green		565	2.2	20	7	11
GNT-5632BY	GaAsP/GaP	Yellow		585	2.1	20	4	7
GNT-5632BS	GaAlAs	Super Red		660	1.8	20	8	12
GNT-5632BD	GaAlAs	Ultra Red		660	1.8	20	22	28